

FBM – Fiber Bragg Mirror



BATOP GmbH
Stockholmer Str. 14
07747 Jena
Germany

Phone: +49 3641 634009 - 0
Fax: +49 3641 634009 - 20
URL: <http://www.batop.de>
e-mail: info@batop.de

Product Overview

- Bragg Mirror directly coated on a polarization maintaining single mode fiber for mode-locked laser applications.
- Large bandwidth
- Low dispersion
- Can be used as an output coupler
- Doesn't increase the cavity length
- Well suited for high repetition rate mode-locked lasers
- Can be combined with a Fiber Laser Oscillator Core Module to build a femtosecond mode-locked laser for, e.g., 1560nm.


FBM-1560-85-SM15PSU25-PC-35-0.9-APC

HR band: 1510 nm – 1610 nm
Reflectance: 85 % \pm 3 %
Fiber type: Fujikura SM15-PS-U25D
Connectors: FC/APC - FC/PC

FBM-1560-85-PMESF7-PC-23-0.9-APC

HR band 1510 nm – 1610 nm
Reflectance: 85 % \pm 3 %
Fiber type: Coherent PM-ESF-7/125
Connectors: FC/APC

Configurations

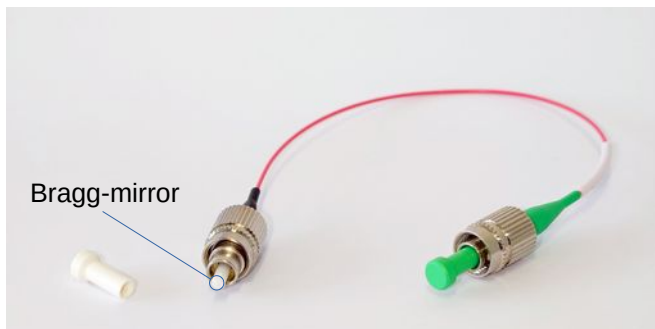

Standard configuration – Bragg mirror coated on a FC/PC connector



Alternative configuration – Bragg-mirror coated on the fiber end, butt coupled to another fiber, and mounted in a steel tube.

Bragg mirrors for other wavelength, reflectance, and / or fibers can be designed and delivered as well, please ask!

